



CHIEFTAIN

G1016X General Purpose Oven

Key features

- Full depth worktop surface
 - Provides valuable kitchen workspace
- Reinforced drop down door
 - Rest food on door when loading / unloading if necessary
- Wide oven temperature range of 125 - 275°C
 - Ideal to prepare a wide variety of food
- Piezo ignition to oven
 - Simple, trouble-free operation
- Twin oven doors with individual catches
 - Retains heat within the oven chamber
- Oven has 4 shelf positions and allows 2 shelf cooking
 - Versatile, ideal for a wide range of menu items

Accessories



- Pot rack
- Oven shelf
- Factory fitted, adjustable castors

Similar Models


- G3117 GP oven
- G3117D GP oven with drop down door
- E1006 Electric GP oven



General Purpose Oven



Measurements *in mm*

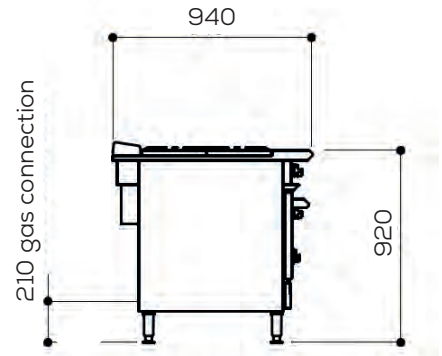

Unit on castors is same height

Specification *details*

Total rating (natural and propane - kW - Nett)	11		
Total rating (natural and propane - btu/hr - gross)	38,000		
Inlet size (natural)	3/4" BSP		
Inlet size (propane)	1/2" BSP		
Flow rate - natural (m ³ /hr)	1.06		
Flow rate - propane (kg/hr)	0.78		
Inlet pressure (natural and propane - mbar)	20 / 37		
Operating pressure (natural and propane - mbar)	15 / 37		
Weight (kg)	177		
Packed weight (kg)	190		
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100		
GTIN numbers			
Nat Gas (feet)	Nat Gas (castors)	LPG (feet)	LPG (castors)

Installation notes

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air for combustion and to allow easy removal of such products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172.

For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning.

Unit must be installed on a firm level, non-combustible floor in a well lit position. All models should have a 150mm minimum clearance all round from any combustible wall and 150mm from any non-combustible side wall to allow removal of side panels. There should also be a minimum vertical clearance of 1220mm above top edge of flue.

