



# CHIEFTAIN

## *G1808X Single Pan Fryer*

### Key features

- Accurate temperature control and recovery
  - Efficient high yield performance
- All stainless steel constructions
  - Robust construction to withstand busy demands
- Temperature range between 140 - 190°C
  - Variable, precise control
- Piezo ignition
  - Simple, trouble-free operation
- Fast-acting safety thermostat
  - Power cut to unit if oil overheats
- Supplied with fish grid, basket and lid
  - Everything you need to start frying

### Accessories




- Side Screens
- Hob capper (joins two units)
- Factory fitted, adjustable castors

### Similar Models

- G1838X Twin basket fryer
- G3830 single pan fryer
- G401 twin basket fryer
- E1808 single pan fryer



## Single Pan Fryer

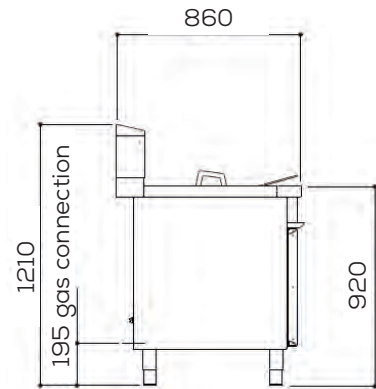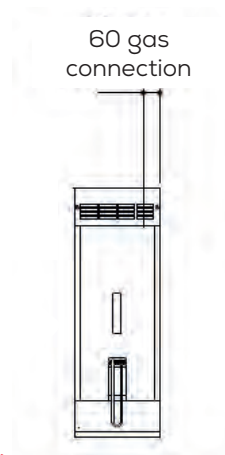

Measurements *in mm*

Unit on castors is same height

## Specification *details*

Total rating (natural and propane - kW - Nett)	16.7		
Total rating (natural and propane - btu/hr - gross)	62,700		
Inlet size (natural and propane)	1/2" BSP		
Flow rate - natural (m <sup>3</sup> /hr)	1.75		
Flow rate - propane (kg/hr)	1.23		
Inlet pressure (natural and propane - mbar)	20 / 37		
Operating pressure (natural and propane - mbar)	13 / 35.6		
Oil capacity (litres)	15		
Hourly chip output (kg)	32		
Weight (kg)	64		
Packed weight (kg)	72		
Packed dimensions (w x d x h - mm)	400 x 1000 x 1300		
GTIN numbers			
Nat Gas (feet)	Nat Gas (castors)	LPG (feet)	LPG (castors)

## Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm between appliance and any combustible wall and a minimum vertical clearance of 1220mm above the top edge of flue should be observed.

