



DOMINATOR*PLUS*

G3117 2-Tier General Purpose Oven

Key features

- Full depth worktop surface
 - Provides valuable kitchen workspace
- Vitreous enamelled oven chamber
 - Easy to clean and to keep clean
- Wide oven temperature range of 120 - 270°C
 - Ideal to prepare a wide variety of food
- Piezo ignition to oven
 - Simple, trouble-free operation
- Twin oven doors with individual catches
 - Retains heat within the oven chamber
- Oven has 5 shelf positions and allows 2 shelf cooking
 - Versatile, ideal for a wide range of menu items
- Low profile door handles
 - Reduces intrusion into work space
- Laser-etched control icons
 - Permanent, indelible markings

Accessories


- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit

Similar Models

- G2112 Two tier gas convection oven
- E3117/2 Two tier electric GP oven



2-Tier General Purpose Oven

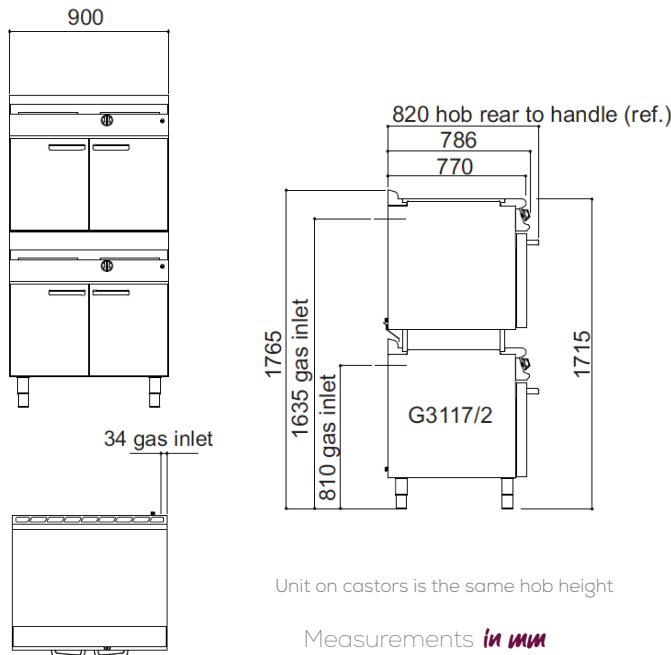

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

Specification details

Total rating (natural and propane - kW - Nett)	7.1 x 2		
Total rating (natural and propane - btu/hr - gross)	26,600 x 2		
Inlet size (natural and propane)	3/4" BSP x 2		
Flow rate - natural (m ³ /hr)	0.80 x 2		
Flow rate - propane (kg/hr)	0.60 x 2		
Inlet pressure (natural and propane - mbar)	20 / 37		
Operating pressure (natural and propane - mbar)	15 / 37		
Oven burner rating * (natural and propane - kW)	7.1 x 2		
Oven burner rating * (natural and propane - btu/hr)	26,600 x 2		
Oven dimensions (w x d x h - mm)	700 x 535 x 430		
Oven shelf (w x d - mm)	700 x 535		
Gastronorm compatibility	2/1		
Weight (kg)	195		
Packed weight (kg)	230		
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100 (x 2 -stack on site)		
GTIN numbers			
Nat Gas (feet)	Nat Gas (castors)	LPG (feet)	LPG (castors)

