



## DOMINATOR PLUS

# G3840FX Single Pan Fryer with Filtration

### Key features

- Energy efficient, high performance burner
  - Quick heat up and recovery times
- Automatic two-stage filtration built in
  - Increases oil longevity and maintains quality
- Stainless steel hob with mild steel pan
  - Robust construction to withstand busy demands
- Temperature range between 140 - 190°C
  - Variable, precise control
- Sediment collection zone
  - Keeps all cleaner for longer
- Electric ignition to burner
  - Quick and easy lighting
- Fast-acting safety thermostat
  - Power cut to unit if oil overheats
- Supplied with fish grid, basket and lid
  - Everything you need to start frying
- Supplied with drain bucket, strainer and filter
  - Essential parts of the filtration process
- Laser-etched control icons
  - Permanent, indelible markings

### Accessories

- Sidescreens
- Factory fitted, adjustable castors
- Fixed installation kit

### Similar Models

- E3840 Single pan, twin basket electric fryer
- G3860F Single pan, twin basket fryer with filtration
- G9341F Single pan, twin basket fryer with filtration
- E3840F Single pan, twin basket electric fryer with filtration



## FRYER ANGEL


The unique *Falcon Fryer Angel* safety system prevents fryer fires, making it a must-have for any commercial kitchen.

The most common causes of fryer fire occur when oil levels are too low during cooking or when the appliance is switched on without the operator checking to see if there is enough oil in the pan. The *Falcon Fryer Angel* eradicates this by simply cutting power to the unit if the oil level is not at a sufficiently high level.

**The Falcon Fryer Angel - making your kitchen safer!**

*Patent applied for, Patent Application No. 2002725.6 (UK), PCT/GB2020/050462 (International)*

## Single Pan Fryer with Filtration

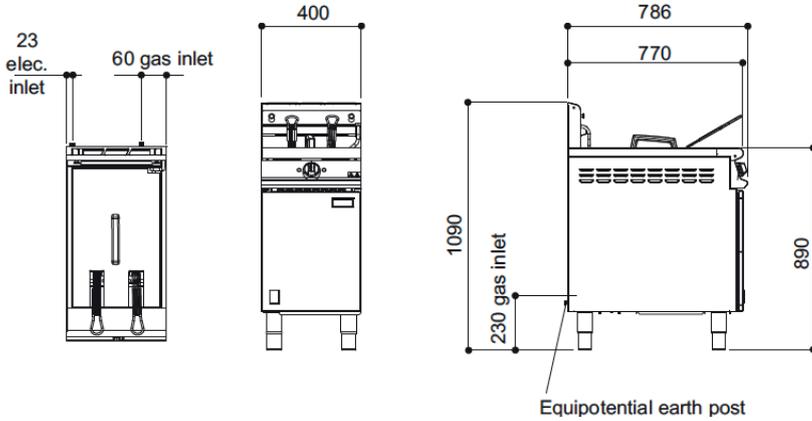

Measurements *in mm*

Unit supplied with 2m main cable

Unit on castors is the same hob height

### Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

### Specification *details*

Total rating (natural and propane - kW - Nett)	22		
Total rating (natural and propane - btu/hr - gross)	82,500		
Electrical supply voltage	230V N~		
Inlet size (natural and propane)	3/4" BSP		
Flow rate - natural (m <sup>3</sup> /hr)	2.33		
Flow rate - propane (kg/hr)	1.57		
Inlet pressure (natural and propane - mbar)	20 / 37		
Operating pressure (natural and propane - mbar)	14 / 34.6		
Oil capacity (litres)	18		
Hourly chip output (kg)	34		
Weight (kg)	83		
Packed weight (kg)	94		
Packed dimensions (w x d x h - mm)	450 x 1000 x 1300		
GTIN numbers			
Nat Gas (feet)	Nat Gas (castors)	LPG (feet)	LPG (castors)
5056466907037	5056466907051	5056466907044	5056466907068

