



### ELECTRIC INDUCTION RANGE · SIX ZONE

# E3916i

Induction Range with six heat zones & 2/1 GN fan-assisted oven

**21.4 kW**

Electrical rating

**400V 3N~**

Supply

**6 × 2.5 kW**

Induction heat zones

**6.4 kW**

Fan-assisted oven

**900 × 853 mm**

Footprint, W × D

**140 kg**

Unit weight



## SPECIFICATION

### Electrical

|                              |                               |
|------------------------------|-------------------------------|
| Electrical rating            | 21.4 kW                       |
| Supply voltage               | 400V 3N~                      |
| Electrical current split (A) | L1: 35.65 L2: 35.65 L3: 21.74 |

### Hob

|                    |            |
|--------------------|------------|
| Heat zones         | 6 × 2.5 kW |
| Heat zone diameter | 190 mm     |
| Minimum pan size   | 120 mm     |

### Dimensions

|                             |                          |
|-----------------------------|--------------------------|
| Width                       | 900 mm                   |
| Depth, front of hob to rear | 853 mm                   |
| Hob height                  | 900 mm                   |
| Mounting                    | Castors rear, feet front |


### Oven

|                       |                        |
|-----------------------|------------------------|
| Element rating        | 6.4 kW                 |
| Temperature range     | 100–250 °C             |
| Gastronorm            | 2/1                    |
| Oven size (W × D × H) | 700 × 535 × 430 mm     |
| Oven shelf (W × D)    | 700 × 535 mm           |
| Shelf positions       | 5 (2 shelves supplied) |

### Weight & packing

|               |                       |
|---------------|-----------------------|
| Weight        | 140 kg                |
| Packed weight | 155 kg                |
| Packed size   | 1000 × 1000 × 1100 mm |

## DIMENSIONS

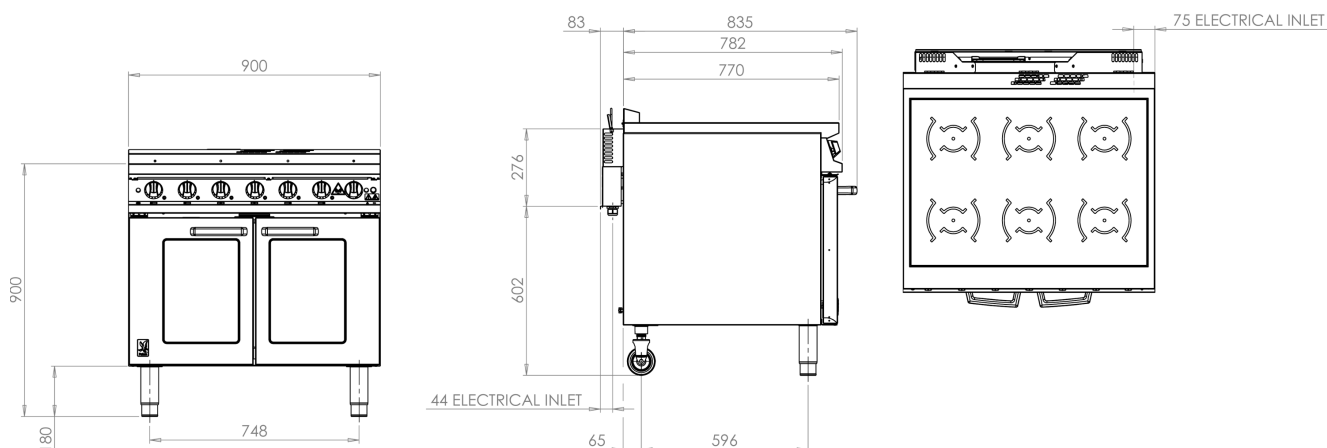

A clearance of 150mm should be observed between appliance and any combustible wall.

2/1 GN oven with 5 shelf positions and 2 shelves supplied.  
A wide 100–250 °C range suits a wide variety of food. Twin  
doors with glass panels let you check cooking progress  
without losing heat.

|               |                                |
|---------------|--------------------------------|
| <b>E3614i</b> | 4 × 2.5 kW induction range     |
| <b>E3913i</b> | 4 × 3.5 kW induction range     |
| <b>E3917i</b> | Solid top induction range      |
| <b>E163i</b>  | 6 × 1.85 kW induction range    |
| <b>E3904i</b> | 4 × 5 kW induction boiling top |