

DOMINATORPLUS

G3532 Grill

Key features

- High performance burner systems
 - Ideal for flashing and finishing
- Variable heat settings
 - Save energy when full heat is not required
- Supplied with reversible brander
 - Increases cooking versatility
- Five position shelf runners
 - Provides flexible cooking options
- · Oil collection tray mounted on grid shelf
 - Catches any liquid grese during grilling
- · Removable drip tray
 - Catches grease and debris during grilling
- · All stainless steel exterior, cast iron chamber linings
 - Easy to clean, long lasting and robust

Accessories

- Brander
- Brander carrier
- Floor stand
- Wall bracket
- Bench Legs

Similar Models


- G3512 gas grill
- E3532 electric grill
- E3512 electric grill






G3532



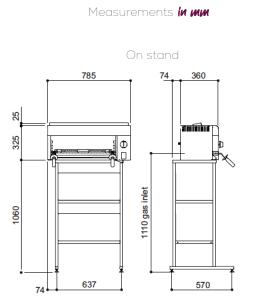

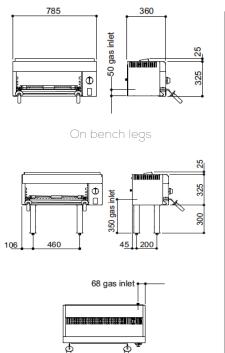



Specification details

| Total rating (natural and propane - kW - Nett) | 6.65 | |
|---|-----------------|---------------|
| Total rating (natural and propane - btu/hr - gross) | 24,960 | |
| Inlet size (natural and propane) | 1/2" BSP | |
| Flow rate - natural (m³/hr) | 0.70 | |
| Flow rate - propane (kg/hr) | 0.52 | |
| Inlet pressure (natural and propane - mbar) | 20 / 37 | |
| Operating pressure (natural and propane - mbar) | 15 / 37 | |
| Brander (w x d - mm) | 540 x 275 | |
| Weight (kg) | 33 | |
| Packed weight (kg) | 40 | |
| Packed dimensions (w x d x h - mm) | 800 x 400 x 550 | |
| GTIN numbers | Nat Gas | LPG |
| | 5056466901813 | 5056466901806 |

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

